


**DP SERIES 100%
VISCOSE FILTER ROLLS**

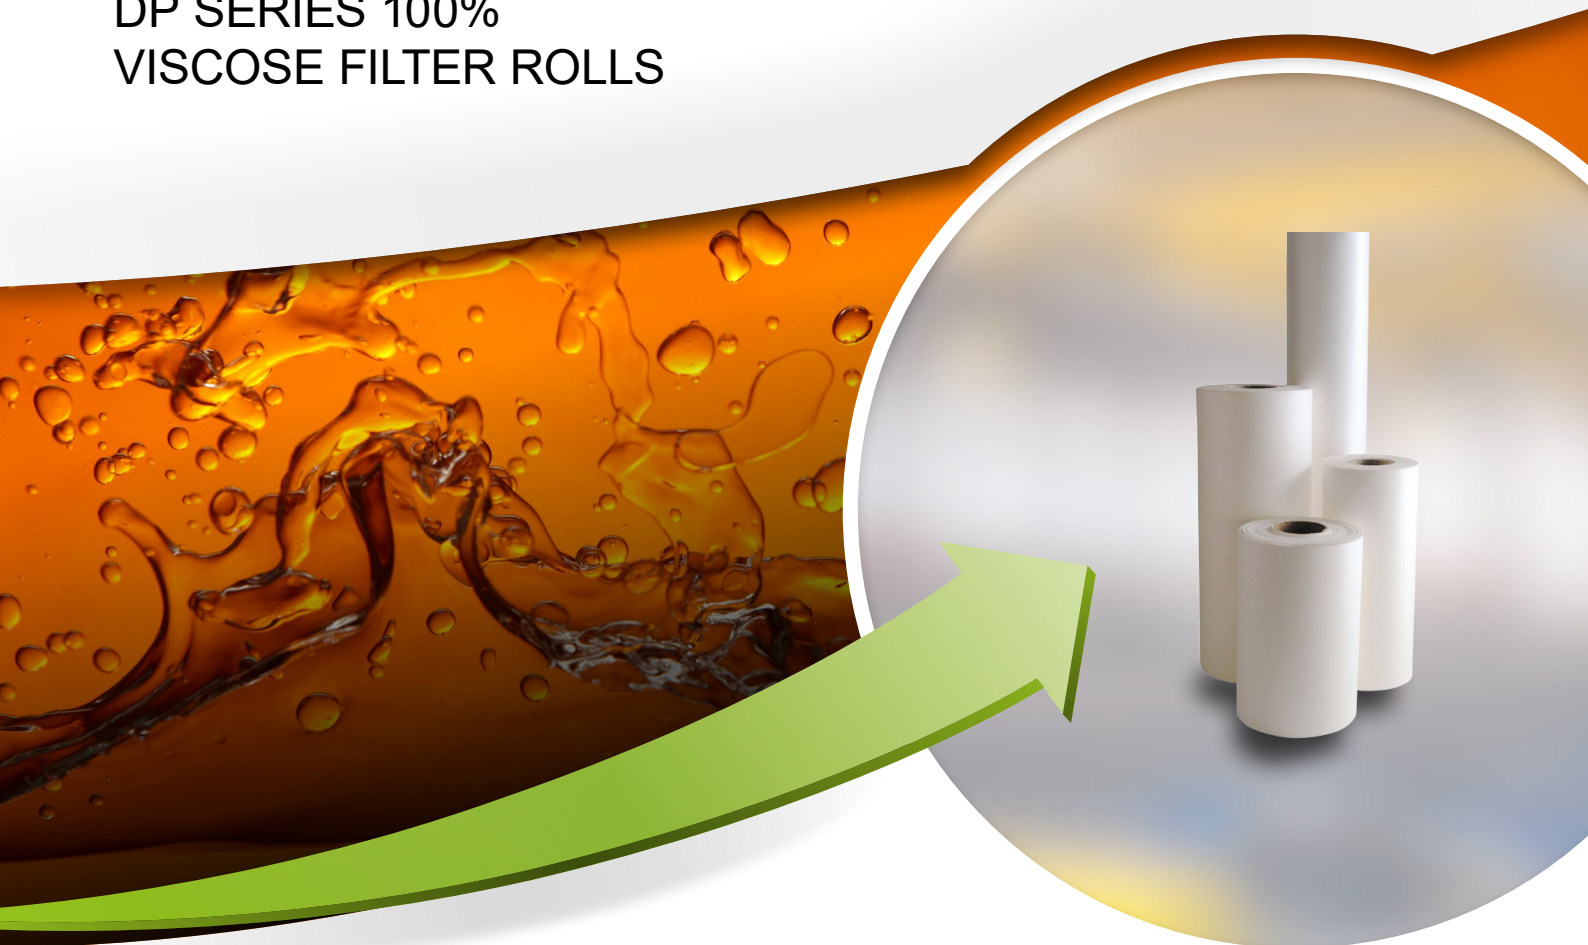

Grade	Weight	Material	Tensile Strength	Typical Application
Coarse	20g/sqm	100% Viscose (with binder)	MD 32 N/5cm CD10 N/5cm	Milling, Turning
Semi Coarse	25g/sqm	100% Viscose (with binder)	MD 48 N/5cm CD12 N/5cm	Normal Grinding
Medium	35g/sqm	100% Viscose (with binder)	MD 60 N/5cm CD18 N/5cm	Fine Grinding
Fine	50g/sqm	100% Viscose (with binder)	MD 70 N/5cm CD24 N/5cm	Horning
Extra Fine	65g/sqm	100% Viscose (with binder)	MD 115 N/5cm CD 40 N/5CMcm	Lapping

Filter rolls are extensively used for machine tool coolants and cutting & lubricating fluids found throughout the metalworking industry. Our non-toxic viscose media is very commonly used in various grades. When in operation the viscose filter rolls filter the contaminant, building up an efficient filter cake. Please note, the maximum operating temperature is 65 degrees.

When ordering please specify the width (mm) Length (M) & Grade

T: +44 (0) 1952 209999
F: +44 (0) 1952 299231
E: sales@directfiltration.co.uk
W: directfiltration.co.uk